



LR QUICK

Pipestop

LR Quick Pipestop

The LR Quick Pipestop is used for sealing off dead and inactive pipelines. We have developed our popular LR Quick Pipestop so that you can move on to the next job right away - there's no need to wait for the plug to harden. The LR Quick is equipped with a quick coupling and trigger release, which allows it to be safely and easily disconnected immediately after inflation. This means no waiting time and no loss of pressure during disconnection. The pipeline is sealed completely, also preventing rats from entering.



Quick release

The quick coupling and trigger release allow the LR Quick Pipestop to be safely disconnected immediately after inflation - with no waiting time and no loss of pressure.



Secure pipe sealing

Designed to completely seal dead and inactive pipelines, while also helping prevent rats from entering through the pipe.

Advantages:


- ✓ Cost-effective
- ✓ Easy and quick to install
- ✓ Self-curing, allowing you to move on to the next task
- ✓ Low start-up costs
- ✓ 100% airtight
- ✓ Prevents rats from building nests in dead pipelines

LR Quick Pipestop

From DN75-DN370



Accessories:

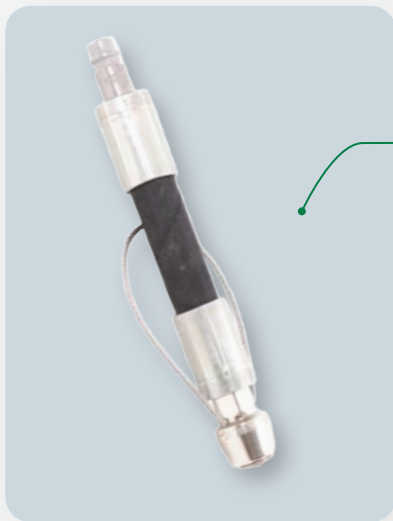

Remote Release without wire

Perforate the transparent pipe foil to prevent resin spillage and ensure adhesion to the pipe.

Art.no.: 0171259



Remote Release with wire

Easily cuts through the impregnated glassliner.

Art.no.: 0196443

	Description	Art.no.	Size	Resin Usage
	Delivered complete with pipe plug, mixing bag, foil, tie wire, protective gloves and instructions. Resin is not included.	0186075	DN75	0,50
		0186100	DN100	0,50
		0186125	DN125	0,75
		0186150	DN150	0,75
		0186200	DN200	1,00
		0186225	DN225	1,00
		0186250	DN250	1,50
		0186300	DN300	1,50
		0186350	DN350	2,00
	Description	Art.no.	Lenght	Color
	With the push rods, you can place the Pipestop correctly and apply the correct air pressure to it. The push rods can be connected to reach the desired length. Supplied in 1.5 meter and 3.0 meter lengths.	0196018	1,5m	Blue
		0196033	3,0m	Blue
	The steering handle is fitted with a manometer, which is used to monitor the air pressure in the Pipestop. It measures up to 1.0 bar and is equipped with a safety valve that prevents excessive air pressure in the Pipestop. The handle is connected to the push rods via female/male couplings.	0186008		
	LR Quick Remote Release female/male for push rods with wire	0186002		
	LR Quick Remote Release female/male for push rods without wire	0186004		
	Description	Art.no.	Size	Color lit
	Silicate from 0,5L to 1L The silicate gives you approx. 15 minutes to place the Pipestop.	0411390	0,50L	Black
		0411392	0,75L	Red
		0411395	1,00L	White