



RISER RINGS, CONES AND COVERS

made from recycled plastic

Table of contents

3.1 INSITU SEAL

2.1.1 Insitu-Seal with built in stop, SBR	7
2.1.2 Insitu-Seal with built in stop, NBR (olieresistent)	7
2.1.3 Insitu-Seal with built in stop and clamps, SBR	7
2.1.4 Compression set with clamps and plastic pipe, SBR	8
2.1.5 Compression set with clamps and plastic pipe, NBR (olieresistent)	8
2.1.6 Compression tool for Insitu-Seal	8

3.2 LSK WALL SEAL

2.2.1 LSK960 Wall Seal for smooth plastic and steel pipes - connection on concrete, SBR	11
2.2.2 LSK960 Wall Seal for smooth plastic and steel pipes - connection on concrete, EPDM	11
2.2.3 LSK960 Wall Seal for smooth plastic and steel pipes - connection on concrete, NBR	11
2.2.4 LSK 960 Wall Seal for EURO and IG concrete pipes - connection on concrete, EPDM	13
2.2.5 LSK960 Wall Seal for clay pipes - connection on concrete, EPDM	13
2.2.6 LSK960 Wall Seal for clay pipes - connection on concrete, SBR	13
2.2.7 LSK960 Wall Seal for clay pipes - connection on concrete, NBR	13
2.2.8 LSK960 Wall Seal compression set, SBR (available in NBR as well)	13
2.2.9 LSK 960 Wall Seal for TERRA/OPPTIRIB and PRAGMA pipes - connection on concrete, EPDM	14
2.2.10 LSK 960 Wall Seal for TERRA/OPPTIRIB and PRAGMA pipes - connection on concrete, NBR	14
2.2.11 LSK 960 Wall Seal for Ultra 1 - connection on concrete, EPDM	16
2.2.12 LSK 960 Wall Seal for Ultra 1 - connection on concrete, NBR	16
2.2.13 LSK 960 Wall Seal for Ultra 2 - connection on concrete, EPDM	16
2.2.14 LSK 960 Wall Seal for Ultra 2 - connection on concrete, NBR	17

2.3 LM MULTI SEAL

2.3.1 LM50 Multi Seal for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	19
2.3.2 LM50 Multi Seal with clamps for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	20
2.3.3 LM100 Multi Seal for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	21
2.3.4 LM100 Multi Seal with clamps for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	22
2.3.5 LM150 Multi Seal for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	22
2.3.5 LM150 Multi Seal for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	23
2.3.6 LM150 Multi Seal with clamps for smooth plastic and steel pipes - connection on concrete and plastic, EPDM	23
2.3.7 LM 20 Multi Seal for smooth plastic and steel pipes - connection on thin walled pipe and wellse, EPDM	24
2.3.8 LM 20 Multi Seal for smooth plastic and steel pipes - connection on thin walled pipe and wells, TPE	24
2.3.9 LM 60 Multi Seal for smooth and corrugated pipes - connection on concrete and plastic, EPDM	25

Drainage products for professionals



Need any help?

Open:

Man - thursday: 7.30 - 16.00

Friday: 7.30 - 14.30

Contact information:

Supportphone.: +45 7516 9031

E-mail: info@lrt.dk

web: Lauridsenint.com

Having more than 25 years of experience as a producer and serviceprovider Lauridsen Solutions is one of the leading suppliers within Riser rings, cones and covers.

Through our wholesalers and building supply's we distribute products solving the most basic needs, which we in everyday life do not think about. A large part of our products are hidden behind walls, floors, road or parkinglots etc.

We thrive living quiet. The most important thing for us is that we can solve one or more challenges for our customers.

Our high service is based on the fact that we have our own production, a large assortment on stock and a good cooperation with our customers. We deliver the right solutions to our customer in a timely manner with pride.

Pipe Seals

Used by engineers, installers and communities worldwide.

Here you can find a large variety of pipe seals that can be used on different applications.

LSK960 Wall Seal (Insitu-Seal)

Wall Seals provides an efficient method of making a 90° connection of plastic- or steel pipes onto materials with wide wall thickness such as concrete chambers, concrete pipes etc.

Wall Seals allow for angular and lateral misalignment of the pipes and provide an effective seal against water penetration along the pipe.

We deliver the seals in both EPDM and NBR. The Wall Seal is VA approved and it can withstand hydrostatic pressure of 0,5 bar.

Advantages

- High performance and effective seal
- Quick and easy to install
- Cost effective and secure solution
- VA approved

Insitu-seal

Insitu-Seal provides an efficient method of making a 90° connection into twinwall and ribbed pipe systems.

By drilling a hole into the twinwall or ribbed pipe, the Insitu-Seal is then inserted to allow the connecting pipe to be positioned until it reaches the bottom of the seal. The Insitu-Seal is manufactured in SBR rubber with nitrile available upon request.

Advantages

- Easy installation
- Cost effective
- VA-approved
- With built in stop

LM Multi Seals

The LM Tank Seal is used for connecting smooth plastic or corrugated pipes or steel pipes on both concrete- and plastic pipes or concrete or plastic wells. The seal can be delivered in width/depth up to 150 mm. It is available in both EPDM and NBR and can be made in special sizes if need.

Advantages

- Easy to install on concrete or plastic
- Available in special sizes
- No use of tools
- Available in EPDM or NBR



Insitu-Seal

2.1



90°
connection on twin
wall or ribbed pipe
systems

Insitu-Seal

Insitu-Seal provides an efficient method of making a 90° connection into twin wall and ribbed pipe systems.

By drilling a hole into the twinwall or ribbed pipe, the Insitu-Seal is then inserted to allow the connecting pipe to be positioned until it reaches the bottom of the seal.

Insitu seals are available for connecting DN110 and DN160 pipes into main drainage systems.

- Provides a 90° connection for twin wall and ribbed pipe systems
- Cost effective and efficient method
- Quick and easy installation
- VA-approved



2.1.1 Insitu-Seal with built in stop, SBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Height (mm)	Application
Insitu-Seal 110/127x60 SBR	192774110	5698390	110	127	60	Insitu-Seal provides an efficient method of making a 90° connection into twin wall and ribbed pipe systems like:
Insitu-Seal 160/177x60 SBR	192774160	5698392	160	177	60	
Insitu-Seal 110/127x90 SBR	192774710	5698395	110	127	90	ULTRA, OPPTIRIB, TERRA, PRAGMA, UPOROL etc. The pipe that is mounted within the Insitu-Seal must maximum have a 250 mm length.
Insitu-Seal 160/177x90 SBR	192774760	5698397	160	177	90	
Insitu-Seal 200/217x75 SBR	192774200	1840291	200	217	75	

2.1.2 Insitu-Seal with built in stop, NBR (oil resistant)



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Height (mm)	Application
Insitu-Seal 110/127x60 NBR	192774111	5698391	110	127	60	Insitu-Seal provides an efficient method of making a 90° connection into twin wall and ribbed pipe systems like:
Insitu-Seal 160/177x60 NBR	192774161	5698393	160	177	60	
Insitu-Seal 110/127x90 NBR	192774711	5698396	110	127	90	ULTRA, OPPTIRIB, TERRA, PRAGMA, UPOROL etc. The pipe that is mounted within the Insitu-Seal must maximum have a 250 mm length.
Insitu-Seal 160/177x90 NBR	192774761	5698398	160	177	90	
Insitu 200/217x75 NBR	192774201		200	217	75	

2.1.3 Insitu-Seal with built in stop and clamps, SBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Height (mm)	Application
Insitu-Seal 110/127x90 SBR with clamps	192773710	5719613	110	127	90	Insitu-Seal provides an efficient method of making a 90° connection into twin wall and ribbed pipe systems and wells Clamps are made of acid proof stainless steel AISI 316. Torque 6-8 Nm.
Insitu-Seal 160/177x90 SBR with clamps	192773760	5719615	160	177	90	

2.1.4 Compression set with clamps and plastic pipe, SBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Height (mm)	Application
Compression set 110/127x90 SBR	192773110	5306966	110	127	90	Insitu-Seal provides an efficient method of making a 90° connection into twin wall and ribbed pipe systems and wells. Delivered with plastic pipe.
Compression set 160/177x90 SBR	192773160		160	177	90	

2.1.5 Compression set with clamps and plastic pipe, NBR (oil resistant)




Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Height (mm)	Application
Compression set 110/127x90 SBR	192773111	5306972	110	127	90	Insitu-Seal provides an efficient method of making a 90° connection into twin wall and ribbed pipe systems and wells. Delivered with plastic pipe.
Compression set 160/177x90 SBR	192773161	5306973	160	177	90	


2.1.6 Compression tool for Insitu-Seal



Name	Product no.	DB no.
Compression tool	192773965	1241807

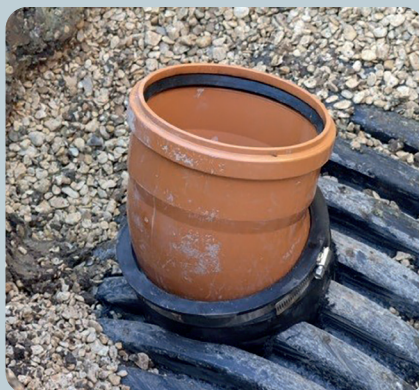

Services



Access **your** prices

Create a user on www.lhisolutions.com today and get access to your prices. Use the webshop as your digital pricelist.



Quick access to documentation

On www.lhisolutions.com you can quickly find installation manuals, approvals etc. Find it under each product page or under > Documentation.



Product selector

Our product selector instantly guides customers to the best connection for their specific need. Two to three questions are all that's asked to find the required product.



Make **your own** list of favorites

With a user on www.lhisolutions.com you can make your own list of favorites so you can quickly get an overview of your favorite products and their prices.



Free calculation and dimensioning

We always supply free guidance, calculation and dimensioning. So please don't hesitate to contact us if you need help with a project.



From cable waste to closed products

As one of the leading suppliers of riser rings/ adjustment ring, cones, frames and cover in recycled plastic, we feel a special need to supply products which are good for the environment and that supports the society's goal within recycling of plastic.

LSK960 Wall Seal

2.2



90°
connection
on concrete
pipes or wells

Lauridsen Wall Seal (LSK960)

Wall Seals are rubber rings with a unique profile, designed to create a watertight seal when pipes pass through concrete structures. Particularly suitable for structures such as manholes but are appropriate for many other applications.

The three lip profile design provides multiple sealing points, excellent resistance to transverse shear loads and allows a high level of angular deflection in the joint.

- High performance and effective seals
- Quick and easy installation
- Cost effective
- Each seal complies with BS EN 681-1:1995 requirements for vitrified clay pipes and fittings



2.2.1 Wall Seal for smooth plastic- and steel pipes - Connection on concrete, SBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 50/75x50 SBR smooth	192775050	5695177	50	75	Wall Seal for smooth plastic- and steel pipes - 90° connection on concrete Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 75/101x50 SBR smooth	192775075	5695178	75	101	
LSK960 Wall Seal 110/138x50 SBR smooth	192775110	5829270	110	138	
LSK960 Wall Seal 125/151x50 SBR smooth	192775125	5698066	125	151	
LSK960 Wall Seal 160/186x50 SBR smooth	192775160	5829271	160	186	
LSK960 Wall Seal 200/226x50 SBR smooth	192775200	5695179	200	226	

2.2.2 Wall Seal for smooth plastic- and steel pipes - Connection on concrete, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 225/251x50 EPDM	192775225	5698068	225	251	Wall Seal for smooth plastic- and steel pipes - 90° connection on concrete Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 250/276x50 EPDM smooth	192775250	5695180	250	276	
LSK960 Wall Seal 315/341x50 EPDM smooth	192775315	5695181	315	341	
LSK960 Wall Seal 400/426x50 EPDM smooth	192775400	5695182	400	426	
LSK960 Wall Seal 500/526x50 EPDM	192775500	5695183	500	526	

2.2.3 Wall Seal for smooth plastic- and steel pipes - Connection on concrete, NBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 110/138x50 NBR smooth	192775111	5829272	110	138	Wall Seal for smooth plastic- and steel pipes - 90° connection on concrete Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 125/151x50 NBR smooth	192775126	5698067	125	151	
LSK960 Wall Seal 160/186x50 NBR smooth	192775161	5829273	160	186	
LSK960 Wall Seal 200/226x50 NBR smooth	192775201	5695185	200	226	
LSK960 Wall Seal 225/251x50 NBR smooth	192775226	5698069	225	251	
LSK960 Wall Seal 250/276x50 NBR smooth	192775251	5695186	250	276	
LSK960 Wall Seal 315/341x50 NBR smooth	192775316	5695187	315	341	
LSK960 Wall Seal 400/426x50 NBR smooth	192775401	5695188	400	426	
LSK960 Wall Seal 500/526x50 NBR smooth	192775501	5695189	500	526	

Step 1



Step 2



Step 3



Step 4



Find the **correct** products in seconds

Our product selector instantly guides customers to the best connection for their specific need. Two to three questions are all that's asked to find the required product. Go to www.lauridsen.pl and use it today.

2.2.4 Wall Seal for EURO and IG concrete pipes - Connection on concrete, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 210/234x50 EPDM	192772150	5698112	210/150	234	LSK 960 Wall Seal for EURO and IG concrete pipes - connection on concrete Tolerance drill hole ± 1 mm. Available in SBR and NBR (oil resistant) as well.
LSK960 Wall Seal 267/293x50 EPDM	192772200	5698114	267/200	293	
LSK960 Wall Seal 326/352x50 EPDM	192772250	5698115	326/250	352	
LSK960 Wall Seal 376/402x50 EPDM	192772300	5698116	376/300	402	
LSK960 Wall Seal 472/498x50 EPDM	192772400	5698117	472/400	498	
LSK960 Wall Seal 606/632x50 EPDM	192772500	5698118	606/500	632	

2.2.5 Wall Seal for clay pipes

Connection on concrete, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 131/157x50 EPDM	192772600	5698119	131/100	157	LSK 960 Wall Seal for clay pipes - connection on concrete Tolerance drill hole ± 1 mm. Available in NBR (oil resistant) as well.
LSK960 Wall Seal 186/212x50 EPDM	192772650	5698120	186/150	212	
LSK960 Wall Seal 242/268x50 EPDM	192772700	5698122	242/200	268	

2.2.6 Wall Seal for clay pipes

Connection on concrete, SBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 160/186x105 SBR smooth	192775112	1618547	110	138	LSK 960 Wall Seal for clay pipes - connection on concrete Tolerance drill hole ± 1 mm. Long model 105 mm.
LSK960 Wall Seal 160/186x105 SBR smooth	192775162	1618558	160	186	

2.2.7 Wall Seal for clay pipes

Connection on concrete, NBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 110/138x105 NBR smooth	192775113	1618556	110	138	LSK 960 Wall Seal for clay pipes - connection on concrete Tolerance drill hole ± 1 mm. Long model 105 mm.
LSK960 Wall Seal 160/186x105 NBR smooth	192775163	1618579	160	186	

2.2.8 Wall Seal compression set, SBR (available in NBR as well)



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)
LSK960 compression set 110/138x50 SBR smooth	192775710	1242933	110	138
LSK960 compression set 160/186x50 SBR smooth	192775760	1242935	160	186

2.2.9 LSK 960 Wall Seal for TERRA/OPPTIRIB- and PRAGMA pipes

Connection on concrete, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 200/226x50 EPDM Corrugated	192776200	5695190	200	226	LSK 960 Wall Seal for TERRA/OPPTIRIB- and PRAGMA pipes - connection on concrete Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 250/276x50 EPDM Corrugated	192776250	5695191	250	276	
LSK960 Wall Seal 315/341x50 EPDM Corrugated	192776315	5695193	315	341	
LSK960 Wall Seal 400/426x50 EPDM Corrugated	192776400	5695194	400	426	
LSK960 Wall Seal 500/526x50 EPDM Corrugated	192776500	5695195	500	526	
LSK960 Wall Seal 630/656x50 EPDM Corrugated	192775630	5695196	630	656	

2.2.10 LSK 960 Wall Seal for TERRA/OPPTIRIB- and PRAGMA pipes

Connection on concrete, NBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 200/226x50 NBR Corrugated	192776201	5695197	200	226	LSK 960 Wall Seal for TERRA/OPPTIRIB- and PRAGMA pipes - connection on concrete Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 250/276x50 NBR Corrugated	192776251	5695198	250	276	
LSK960 Wall Seal 315/341x50 NBR Corrugated	192776316	5695199	315	341	
LSK960 Wall Seal 400/426x50 NBR Corrugated	192776401	5698070	400	426	
LSK960 Wall Seal 500/526x50 NBR Corrugated	192776501	5718698	500	526	
LSK960 Wall Seal 630/656x50 NBR Corrugated	192776631	5698072	630	656	

Step 1



Step 2



Step 3



Step 4



Free calculation and dimensioning

We always supply free guidance, calculation and dimensioning. So please don't hesitate to contact us if you need help with a project.

Need any help?

Open:

Man - thursday: 7.30 - 16.00

Friday: 7.30 - 14.30

Contact information:

Supportphone.: +45 7516 9031

E-mail: info@lri.dk

2.2.11 LSK 960 Wall Seal for Ultra 1

Connection on concrete, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 200/226x50 EPDM/ultra 1	192777200	5698062	200	226	LSK 960 Wall Seal for ULTRA 1 - connection on concrete
LSK960 Wall Seal 250/276x50 EPDM/ultra 1	192777250	5698064	250	276	
LSK960 Wall Seal 315/341x50 EPDM/ultra 1	192777315	5698065	315	341	Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 400/426x50 EPDM/ultra 1	192777400	5698086	400	426	Delivered with inlay seal
LSK960 Wall Seal 560/586x50 EPDM/ultra 1	192777560	5698087	560	586	

2.2.12 LSK 960 Wall Seal for Ultra 1

Connection on concrete, NBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 200/226x50 NBR/ultra 1	192777201	5698088	200	226	LSK 960 Wall Seal for ULTRA 1 - connection on concrete
LSK960 Wall Seal 250/276x50 NBR/ultra 1	192777251	5698090	250	276	
LSK960 Wall Seal 315/341x50 NBR/ultra 1	192777316	5698091	315	341	Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 400/426x50 NBR/ultra 1	192777401	5698092	400	426	Delivered with inlay seal
LSK960 Wall Seal 560/586x50 NBR/ultra 1	192777561	5698093	560	586	

2.2.13 LSK 960 Wall Seal for Ultra 2

Connection on concrete, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 200/226x50 EPDM/ultra 2	192779200	5698094	200	226	LSK 960 Wall Seal for ULTRA 2 - connection on concrete
LSK960 Wall Seal 250/276x50 EPDM/ultra 2	192779250	5698095	250	276	
LSK960 Wall Seal 315/341x50 EPDM/ultra 2	192779315	5698096	315	341	Tolerance drill hole ± 1 mm.
LSK960 Wall Seal 400/426x50 EPDM/ultra 2	192779450	5698098	450	476	Delivered with inlay seal
LSK960 Wall Seal 560/586x50 EPDM/ultra 2	192779560	5698099	560	586	

2.2.14 LSK 960 Wall Seal for Ultra 2

Connection on concrete, NBR



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Application
LSK960 Wall Seal 200/226x50 NBR/ultra 2	192779201	5698100	200	226	LSK 960 Wall Seal for ULTRA 2 - connection on concrete Tolerance drill hole ± 1 mm. Delivered with inlay seal
LSK960 Wall Seal 250/276x50 NBR/ultra 2	192779251	5698101	250	276	
LSK960 Wall Seal 315/341x50 NBR/ultra 2	192779316	5698102	315	341	
LSK960 Wall Seal 400/426x50 NBR/ultra 2	192779451	5698103	400	426	
LSK960 Wall Seal 560/586x50 NBR/ultra 2	192779561	5718699	560	586	

Step 1



Step 2



Step 3



Step 4



LM Multi Seals 2.3



90°
connection on
concrete and
plastic pipes or
wells

LM Multi Seals

The LM Multi Seal is used for connecting smooth plastic or corrugated pipes or steel pipes on both concrete- and plastic pipes or concrete or plastic wells. The seal can be delivered in width/depth up to 150 mm. It is available in both EPDM and NBR and can be made in special sizes if need.

Advantages

- Easy to install on concrete or plastic
- Available in special sizes
- No use of tools
- Available in EPDM or NBR



2.3.1 LM50 Multi Seal for smooth plastic- and steel pipes

Connection in concrete and plastic, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM50 Multi Seal 32/44x50 EPDM	193572032	5698073	32	44	50	LM 50 Multi Seal for smooth plastic- and steel pipes - connection on concrete or plastic (50 mm) Tolerance: Drill hole concrete ± 1 mm. Drill hole plastic -2 +1 mm. Available in NBR gummi (oil resistant). Special sizes are made manually and are therefore non-returnable.
LM50 Multi Seal 40/52x50 EPDM	193572040	5698104	40	52	50	
LM50 Multi Seal 50/62x50 EPDM	193572050	5698106	50	62	50	
LM50 Multi Seal 58/70x50 EPDM	193572058	5698365	58	70	50	
LM50 Multi Seal 63/75x50 EPDM	193572063	5698107	63	75	50	
LM50 Multi Seal 75/87x50 EPDM	193572075	5698108	75	87	50	
LM50 Multi Seal 90/102x50 EPDM	193572090	5698109	90	102	50	
LM50 Multi Seal 92/104x50 EPDM	193572092	5698110	92	104	50	
LM50 Multi Seal 100/112x50 EPDM	193572110	5698074	100	112	50	
LM50 Multi Seal 110/122x50 EPDM	193572111	5698111	110	122	50	
LM50 Multi Seal 117/129x50 EPDM	193572112	5698367	117	129	50	
LM50 Multi Seal 125/137x50 EPDM	193572113	5698368	125	137	50	
LM50 Multi Seal 160/172x50 EPDM	193572114	5698075	160	172	50	
LM50 Multi Seal 180/192x50 EPDM	193572118	5698076	180	192	50	
LM50 Multi Seal 200/212x50 EPDM	193572120	5698077	200	212	50	
LM50 Multi Seal 250/262x50 EPDM	193572125	5698078	250	262	50	



2.3.2 LM50 Multi Seal with clamps for smooth plastic- and steel pipes

Connection on concrete and plastic, EPDM



Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM50 Multi Seal 32/44x50 EPDM with clamps	193572232	5202909	32	44	50	LM 50 Multi Seal with clamps for smooth plastic- or steel pipes - connection on concrete or plastic (50 mm) Tolerance: Drill hole concrete ± 1 mm. Drill hole plastic $-2 +1$ mm. Available in NBR gummi (oil resistant). Special sizes are made manually and are therefore non-returnable.
LM50 Multi Seal 40/52x50 EPDM with clamps	193572240	5202910	40	52	50	
LM50 Multi Seal 50/62x50 EPDM with clamps	193572250	5202911	50	62	50	
LM50 Multi Seal 58/70x50 EPDM with clamps	193572258	5202912	58	70	50	
LM50 Multi Seal 63/75x50 EPDM with clamps	193572263	5202913	63	75	50	
LM50 Multi Seal 75/87x50 EPDM with clamps	193572275	5202914	75	87	50	
LM50 Multi Seal 90/102x50 EPDM with clamps	193572290	5202915	90	102	50	
LM50 Multi Seal 92/104x50 EPDM with clamps	193572292	5202917	92	104	50	
LM50 Multi Seal 100/112x50 EPDM with clamps	193572310	5202918	100	112	50	
LM50 Multi Seal 110/122x50 EPDM with clamps	193572311	5202919	110	122	50	
LM50 Multi Seal 117/129x50 EPDM with clamps	193572312	5202920	117	129	50	
LM50 Multi Seal 125/137x50 EPDM with clamps	193572313	5202921	125	137	50	
LM50 Multi Seal 160/172x50 EPDM with clamps	193572316	5202922	160	172	50	
LM50 Multi Seal 180/192x50 EPDM with clamps	193572318	5202923	180	192	50	
LM50 Multi Seal 200/212x50 EPDM with clamps	193572320	5202925	200	212	50	
LM50 Multi Seal 250/262x50 EPDM with clamps	193572325	5202926	250	262	50	

Step 1



Step 2



Step 3





2.3.3 LM100 Multi Seal for smooth plastic- and steel pipes

Connection in concrete and plastic, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM100 Multi Seal 32/44x100 EPDM	193575032	5203031	32	44	100	LM 100 Multi Seal for smooth plastic- and steel pipes - connection on concrete or plastic (100 mm) Tolerance: Drill hole concrete ± 1 mm. Drill hole plastic $-2 +1$ mm. Available in NBR gummi (oil resistant). Special sizes are made manually and are therefore non-returnable.
LM100 Multi Seal 40/52x100 EPDM	193575040	5698380	40	52	100	
LM100 Multi Seal 100/62x100 EPDM	193575050	5698381	50	62	100	
LM100 Multi Seal 58/70x100 EPDM	193575058	5203032	58	70	100	
LM100 Multi Seal 63/75x100 EPDM	193575063	5698382	63	75	100	
LM100 Multi Seal 75/87x100 EPDM	193575075	5698383	75	87	100	
LM100 Multi Seal 90/102x100 EPDM	193575090	5698384	90	102	100	
LM100 Multi Seal 92/104x100 EPDM	193575092	5203033	92	104	100	
LM100 Multi Seal 100/112x100 EPDM	193575110	5203034	100	112	100	
LM100 Multi Seal 110/122x100 EPDM	193575111	5698385	110	122	100	
LM100 Multi Seal 117/129x100 EPDM	193575112	5203035	117	129	100	
LM100 Multi Seal 125/137x100 EPDM	193575113	5203038	125	137	100	
LM100 Multi Seal 160/172x100 EPDM	193575116	5698387	160	172	100	
LM100 Multi Seal 180/192x100 EPDM	193575118	5203040	180	192	100	
LM100 Multi Seal 200/212x100 EPDM	193575120	5698388	200	212	100	
LM100 Multi Seal 250/262x100 EPDM	193575125	5698389	250	262	100	



Make **your own** list of favorites

With a user on www.lhisolutions.com you can make your own list of favorites so you can quickly get an overview of your favorite products and their prices.



From cable waste to closed products

As one of the leading suppliers of riser rings/ adjustment ring, cones, frames and cover in recycled plastic, we feel a special need to supply products which are good for the environment and that supports the society's goal within recycling of plastic.

2.3.4 LM100 Multi Seal with clamps for smooth plastic- and steel pipes



Connection on concrete and plastic, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM100 Multi Seal 32/44x100 EPDM with clamps	193575232	5202927	32	44	100	LM 100 Multi Seal with clamps for smooth plastic- and steel pipes - connection on concrete or plastic (100 mm) Tolerance: Drill hole concrete ± 1 mm. Drill hole plastic -2 +1 mm. Available in NBR gummi (oil resistant). Special sizes are made manually and are therefore non-returnable.
LM100 Multi Seal 40/52x100 EPDM with clamps	193575240	5202928	40	52	100	
LM100 Multi Seal 100/62x100 EPDM with clamps	193575250	5202929	50	62	100	
LM100 Multi Seal 58/70x100 EPDM with clamps	193575258	5237874	58	70	100	
LM100 Multi Seal 63/75x100 EPDM with clamps	193575263	5202931	63	75	100	
LM100 Multi Seal 75/87x100 EPDM with clamps	193575275	5202933	75	87	100	
LM100 Multi Seal 90/102x100 EPDM with clamps	193575290	5202934	90	102	100	
LM100 Multi Seal 92/104x100 EPDM with clamps	193575292	5202935	92	104	100	
LM100 Multi Seal 100/112x100 EPDM with clamps	193575310	5202936	100	112	100	
LM100 Multi Seal 110/122x100 EPDM with clamps	193575311	5202937	110	122	100	
LM100 Multi Seal 117/129x100 EPDM with clamps	193575312	5202938	117	129	100	
LM100 Multi Seal 125/137x100 EPDM with clamps	193575313	5202939	125	137	100	
LM100 Multi Seal 160/172x100 EPDM with clamps	193575316	5202941	160	172	100	
LM100 Multi Seal 180/192x100 EPDM with clamps	193575318	5202942	180	192	100	
LM100 Multi Seal 200/212x100 EPDM with clamps	193575320	5202943	200	212	100	
LM100 Multi Seal 250/262x100 EPDM with clamps	193575325	5202944	250	262	100	

2.3.5 LM150 Multi Seal for smooth plastic- and steel pipes



Connection in concrete and plastic, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM150 Multi Seal 32/44x150 EPDM	193576032	5203041	32	44	150	LM 150 Multi Seal for smooth plastic- and steel pipes - connection on concrete or plastic (150 mm) Tolerance: Drill hole concrete ± 1 mm. Drill hole plastic -2 +1 mm. Available in NBR gummi (oil resistant). Special sizes are made manually and are therefore non-returnable.
LM150 Multi Seal 40/52x150 EPDM	193576040	5203042	40	52	150	
LM150 Multi Seal 100/62x150 EPDM	193576050	5203043	50	62	150	
LM150 Multi Seal 58/70x150 EPDM	193576058	5203044	58	70	150	
LM150 Multi Seal 63/75x150 EPDM	193576063	5203045	63	75	150	
LM150 Multi Seal 75/87x150 EPDM	193576075	5203046	75	87	150	
LM150 Multi Seal 90/102x150 EPDM	193576090	5203048	90	102	150	
LM150 Multi Seal 92/104x150 EPDM	193576092	5203049	92	104	150	
LM150 Multi Seal 100/112x150 EPDM	193576110	5203050	100	112	150	
LM150 Multi Seal 110/122x150 EPDM	193576111	5203051	110	122	150	

2.3.5 LM150 Multi Seal for smooth plastic- and steel pipes



Connection in concrete and plastic, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM150 Multi Seal 117/129x150 EPDM	193576112	5203052	117	129	150	
LM150 Multi Seal 125/137x150 EPDM	193576113	5203053	125	137	150	
LM150 Multi Seal 160/172x150 EPDM	193576116	5203055	160	172	150	
LM150 Multi Seal 180/192x150 EPDM	193576118	5203056	180	192	150	
LM150 Multi Seal 200/212x150 EPDM	193576120	5203057	200	212	150	
LM150 Multi Seal 250/262x150 EPDM	193576125	5203058	250	262	150	

2.3.6 LM150 Multi Seal with clamps for smooth plastic- and steel pipes



Connection on concrete and plastic, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM150 Multi Seal 32/44x150 EPDM with clamps	193576232	5202945	32	44	150	LM 150 Multi Seal with clamps for smooth plastic- or steel pipes - connection on concrete or plastic (150 mm)
LM150 Multi Seal 40/52x150 EPDM with clamps	193576240	5202946	40	52	150	
LM150 Multi Seal 100/62x150 EPDM with clamps	193576250	5202947	50	62	150	
LM150 Multi Seal 58/70x150 EPDM with clamps	193576258	5202948	58	70	150	
LM150 Multi Seal 63/75x150 EPDM with clamps	193576263	5202949	63	75	150	Tolerance: Drill hole concrete $\pm$ 1 mm. Drill hole plastic -2 +1 mm.
LM150 Multi Seal 75/87x150 EPDM with clamps	193576275	5202950	75	87	150	
LM150 Multi Seal 90/102x150 EPDM with clamps	193576290	5202951	90	102	150	Available in NBR gummi (oil resistant).
LM150 Multi Seal 92/104x150 EPDM with clamps	193576292	5202952	92	104	150	
LM150 Multi Seal 100/112x150 EPDM with clamps	193576310	5237875	100	112	150	Special sizes are made manually and are therefore non-returnable.
LM150 Multi Seal 110/122x150 EPDM with clamps	193576311	5202954	110	122	150	
LM150 Multi Seal 117/129x150 EPDM with clamps	193576312	5202955	117	129	150	
LM150 Multi Seal 125/137x150 EPDM with clamps	193576313	5202956	125	137	150	
LM150 Multi Seal 160/172x150 EPDM with clamps	193576316	5202958	160	172	150	
LM150 Multi Seal 180/192x150 EPDM with clamps	193576318	5202959	180	192	150	
LM150 Multi Seal 200/212x150 EPDM with clamps	193576320	5202960	200	212	150	
LM150 Multi Seal 250/262x150 EPDM with clamps	193576325	5202961	250	262	150	

2.3.7 LM 20 Multi Seal for smooth plastic- and steel pipes



Connection on thin walled pipe and wells, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM20 Multi Seal 40/46x20 EPDM	193569040	5238508	40	46	20	LM 20 Multi Seal for smooth plastic- and steel pipes - connection on thin walled pipe and wells Tolerance ± 1 mm
LM20 Multi Seal 50/60x20 EPDM	193569050	5238509	50	60	20	
LM20 Multi Seal 75/83x20 EPDM	193569075	5238510	75	83	20	
LM20 Multi Seal 110/121x20 EPDM	193569110	5238511	110	121	20	

2.3.8 LM 20 Multi Seal for smooth plastic- and steel pipes



Connection on thin walled pipe and wells, TPE

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM20 Manchet 125/134x20 TPE	193570113	5698084	125	134	20	LM 20 Multi Seal for smooth plastic- and steel pipes - connection on thin walled pipe and wells Tolerance ± 1 mm
LM20 Manchet 160/170x20 TPE	193570116	5698085	160	170	20	

2.3.9 LM 60 Multi Seal for smooth and corrugated pipes



Connection on concrete and plastic, EPDM

Name	Product no.	DB no.	Dimension (mm)	Drill hole (mm)	Width (mm)	Application
LM60 Multi Seal 128/144x60 EPDM	193573113	5698369	128	144	60	LM 60 Multi Seal for smooth and corrugated pipes - connection on concrete and plastic, EPDM Tolerance: Drill hole concrete -1 +4 mm Drill hole plastic -4 +1 mm
LM60 Multi Seal 160/176x60 EPDM	193573116	5698370	160	176	60	
LM60 Multi Seal 175/191x60 EPDM	193573118	5698371	175	191	60	
LM60 Multi Seal 200/216x60 EPDM	193573120	5698372	200	216	60	
LM60 Multi Seal 233/249x60 EPDM	193573123	5698373	233	249	60	Width = 60 mm. Materiale: EPDM gummi.
LM60 Multi Seal 250/266x60 EPDM	193573125	5698374	250	266	60	
LM60 Multi Seal 315/331x60 EPDM	193573132	5698375	315	331	60	Available in NBR gummi (oil resistant).
LM60 Multi Seal 400/416x60 EPDM	193573140	5698376	400	416	60	
LM60 Multi Seal 455/471x60 EPDM	193573146	5698377	455	471	60	Special sizes are made manually and are therefore non-returnable.
LM60 Multi Seal 500/516x60 EPDM	193573150	5698379	500	516	60	